



## DUAL-JACK® FLASHING

Our Dual Rack® Flashing comes in 12.0" x 12.0" and 9.0" x 12.5" sizes (Clear/ Black color) and is designed to be used on composition/ asphalt shingle roofs. Just a simple, watertight seal every time.

### PRODUCT LINE

Item #	Product Name
DR-CDJF-01	Dual-Jack Flashing - Clear (9.0" x 12.5")
DR-CDJF-02	Dual-Jack Flashing - Clear (12.0" x 12.0")
DR-BDJF-01	Dual-Jack Flashing - Black (9.0" x 12.5")
DR-BDJF-02	Dual-Jack Flashing - Black (12.0" x 12.0")

### COMPONENT LIST

Material	QTY
Aluminum Flashing	01
EPDM	01

### WARRANTY

10 Year Limited warranty

### ORDERING SPECIFICS

Product	DR-CDJF-01 / DR-BDJF-01	DR-CDJF-02 / DR-BDJF-02
Net Weight	0.41 lbs	0.54 lbs
Standard Pack	10 set / box	10 set / box
Standard Pack Dimension	13.0" (L) x 9.5" (W) x 3.0" (H)	13.0" (L) x 13.0" (W) x 3.0" (H)
Standard Pack Weight	4.5 lbs / box	5.7 lbs / box
Big Pack	40 set / box	40 set / box
Big Pack Dimension	13.0" (L) x 9.5" (W) x 12.0" (H)	13.0" (L) x 13.0" (W) x 12.0" (H)
Big Pack Weight	18.5 lbs / box	23.3 lbs / box

### INSTALLATION GUIDE



1. After securing the Dual Jack roof attachment to the roof, cut a piece of the shingle if required.



2. Gently break seal between shingles and remove any nails.




3. Slide flashing up under shingles and recover the roof with the shingle.



4. Apply fresh compatible sealant around the Dual Jack roof attachment.\* Recommended



5. Press the EPDM down and hold to secure in place.

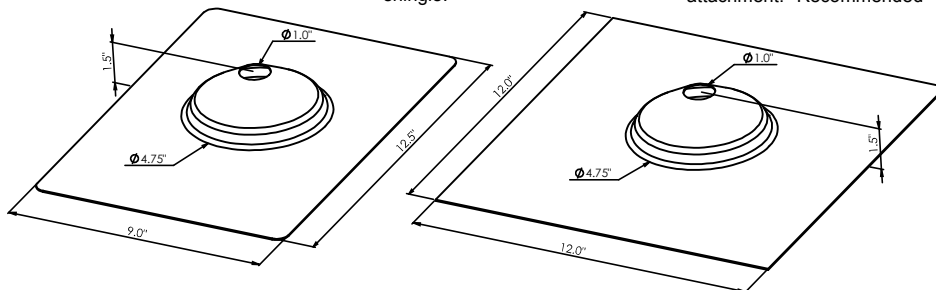

### CONTACT INFO



Dual Rack Inc.  
241 N 10th Street, Unit 4  
Sacramento, CA 95811  
info@DualRack.net www.DualRack.net

### DISTRIBUTOR INFO